


MADE IN ITALY

AI-scp-05,00

01/06/2015

Rev. 01

Page 1 of 4

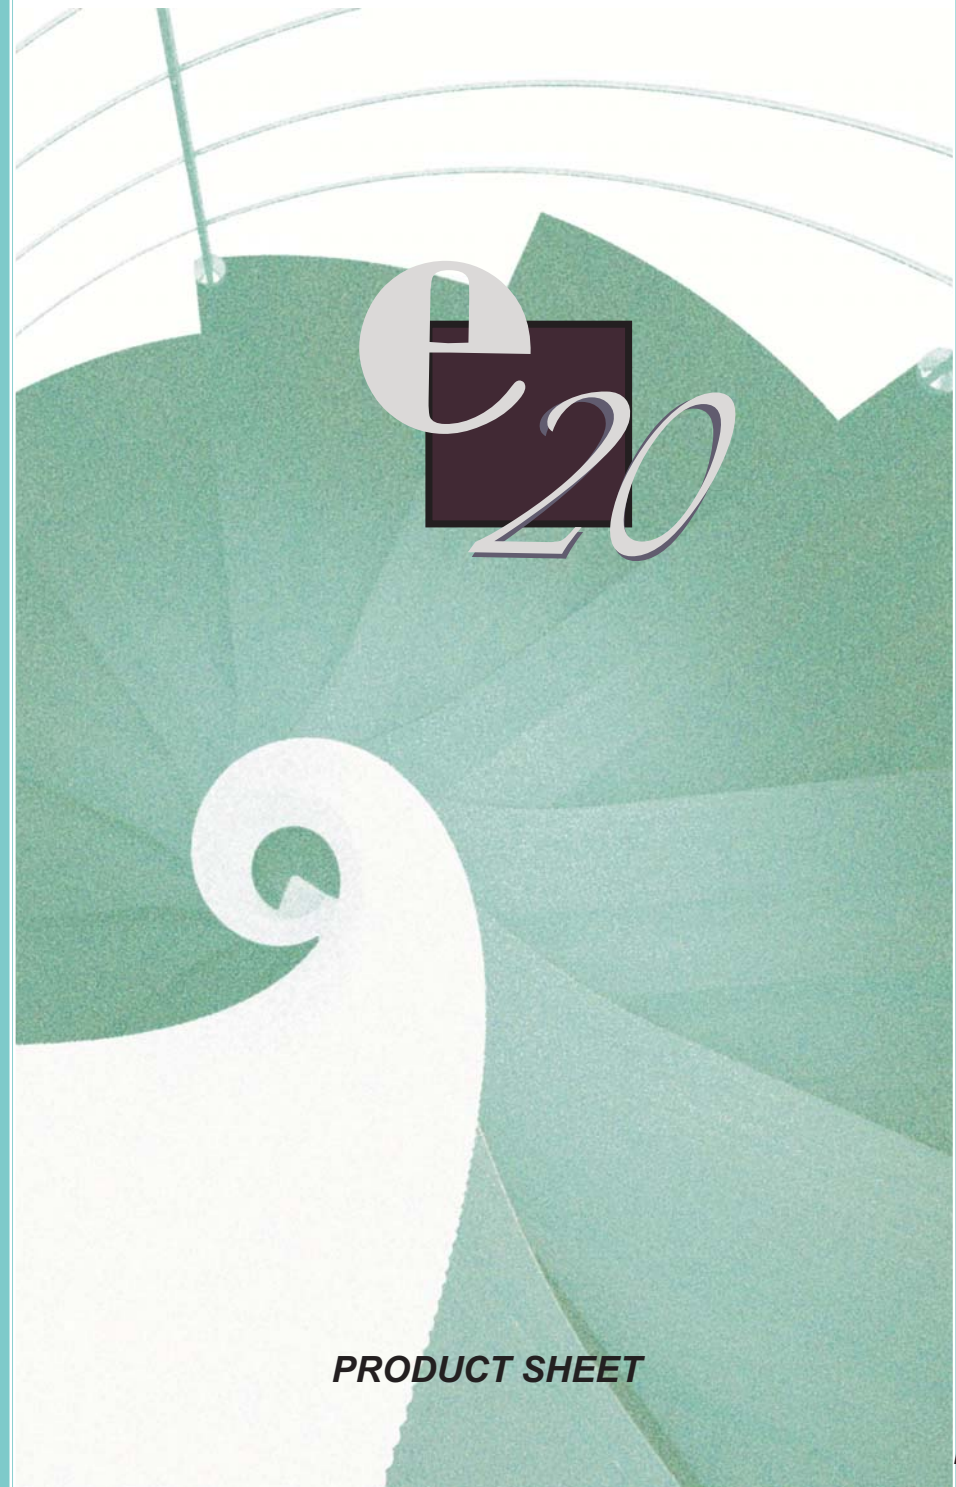

PRODUCT SHEET

Reseller

Page 4 of 4

PRODUCT SHEET

TREADS	STRUCTURE	RAILING	NORMS	NOTES
<p>Description: Steps made of finger-joint beech wood panels, thickness 40 mm glued.</p> <p>Material: Wood: dried finger-joint beech, made of 40mm thick staves of wood glued with vinyl glue.</p> <p>Surface treatment: Wood: treated with a double layer of proper transparent paint. The colored version the painting is applied in advance.</p>	<p>Description: Structure made of polyamide, made of spacers connected through bolts. The steps are fixed on the outer surface of the helical pole with suitable nuts and bolts. The helical pole is secured to the ground through a metal plate.</p> <p>Material: Steel S235JREN10027\2 Plastic: polyamide.</p> <p>Surface treatment: Plastic: the blend is made with coloured granules Steel: painted with epoxy powders - polyesters.</p>	<p>Description: Made of vertical posts of various models: with columns or posts with cables / parallel cables, fixed on the step and handrail through special junction elements. The handrail is made of plastic material, wood or calendered metal.</p> <p>Material: Wood: Solid benchwood Steel: S235JREN10027\2 Plastic: polyamide Stainless Steel: AISI 303 - 304</p> <p>Surface treatment: Wood: treated with a double layer of proper transparent paint. The colored version the painting is applied in advance. Steel: painted with epoxy powders - polyesters. St. Steel: brushed or polished</p>	<p>UNI 10959-01 Spiral stairs - Mechanical resistance to loads.</p> <p>UNI 10803-99 Terminology and classification.</p>	<p>Maintenance: Once the installation is finished, the complete bolts fixings must be verified; it must be verified around 6 months after the installation.</p> <p>Cleaning: The ordinary cleaning of the wooden and plastic parts must be performed with a damp cloth only with water, without the use of abrasive products or solvents. The metal parts can be cleaned with a cloth dampened with commercial products for cleaning furniture that do not contain harsh chemicals or acids or solvents.</p> <p>Disposal: The product and all packaging materials are made with recyclable materials, therefore, all parts and accessories should not be dispersed in the environment, but conferred to the local public systems of disposal, in conformity to the requirements of the regulations.</p>
			PRECAUTIONS OF USE	
			<p>The product can be installed inside of buildings belonging to category "A" EN 1990:2002 with air temperature between +5 °C and +30 °C and humidity values between 30% and 70 %. The fitting and mounting must be carried out by experienced staff making sure the nature of the walls on which adequate anchors must be performed . Modifications to the product are not allowed if the stability is being compromised. Surface treatments can change the tone and the color if exposed to direct light. It is recommended to not expose the product to direct sources heat.</p>	

